


vinyTop®

Cladding System

No more painting

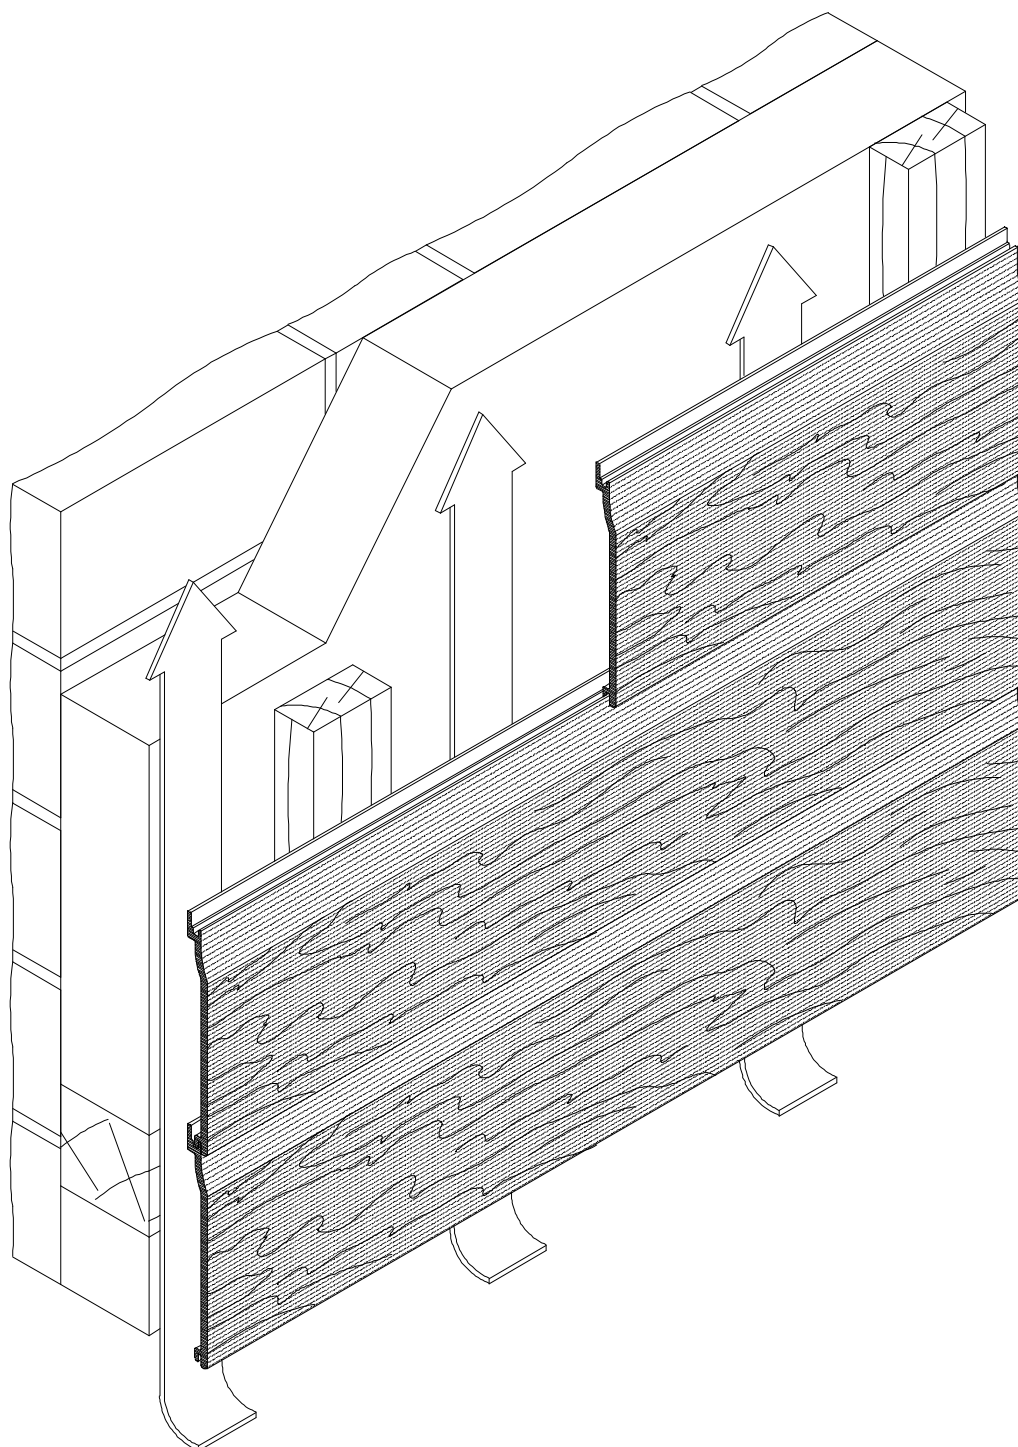

Date: 05/2008
Subject to change and errors

vinylit®

A SURTECO COMPANY

Application

vinyTop Cladding Profiles are made of high quality plastic material using a co-extrusion method. The rigid outer layer is UV resistant and is a guarantee for high durability. **vinyTop** Cladding Profiles are resistant to rotting and to infestation by insects, they have low-maintenance levels and save the troublesome task of repainting.

vinyTop Cladding Profiles are, as a rule, applied horizontally. The contours of the profiles and the wood-graining of the facing convey the optical impression of a traditional wooden shiplap.


vinyTop Cladding Profiles, combined with fittings which are coordinated with and appropriate to the profile, are optimally suited to the fabrication of curtain-type, rear-ventilated façades. Insulating material in any thickness can be integrated into the system. There is thus no difficulty in complying with the latest standards of energy saving requirements.

The **vinyTop** Cladding System is an all-round cost-efficient solution for facing the walls of houses, garages, summer houses, chalets, mobile homes and many other things.


Due to their light weight, **vinyTop** Cladding profiles are particularly suitable for installation in places which are difficult to reach, e.g. dormer windows, gable peaks or for facing the underside of a roof.

Technical Data


Width:	185 mm
Cover width:	167 mm
Thickness:	18 mm
Standard length:	6000 +10 mm
Weight:	approx. 3,8 kg/m ²

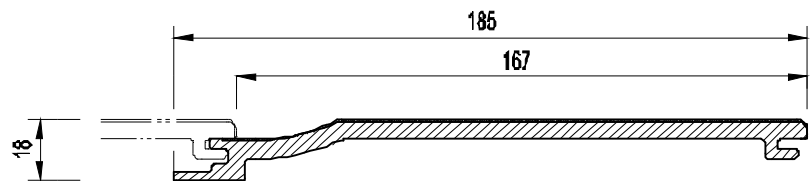


vinyTop Accessories

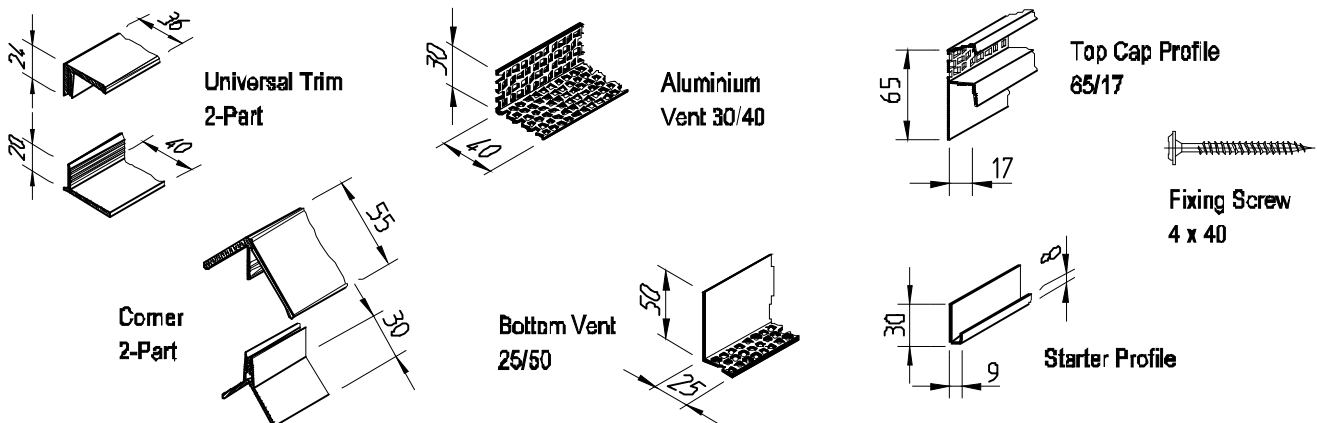


Colours



cream



light ivory



signal white

For typographical reasons deviations from the original colours are possible.



A SURTECO COMPANY

Vinylit Fassaden GmbH
 Gobietstraße 10
 D-34123 Kassel
 Telefon +49(0)561/9591-333
 Fax +49(0)561/9591-302
 e-mail info@vinylit.de
 www.vinylit.com