

Prefinished Engineered Wood Siding

vinyWood® siding profiles are made of real wood manufactured with quality additives and are purpose-built for outside use. The finishing is made of 4 coats of acrylic paint baked on at high temperatures and offers a natural and beautiful design.

vinyWood® offers all of the advantages of regular wood siding but contrary to regular wood, it resists insect attack and will not rot.


Due to a special and stringent production technique the **vinyWood®** siding profiles get a high rigidity, will not crack or split and are resistant to the harshest climatic effects.

Dimensions and Weight


vinyWood® Prestige and Provincial

Width	303	mm
Cover width	279,4	mm
Thickness	13	mm
Length	3.660	mm
Weight	approx. 8,6	kg/m ²

vinyWood® Prestige

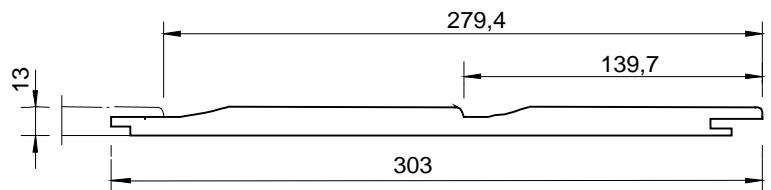


vinyWood® Provincial

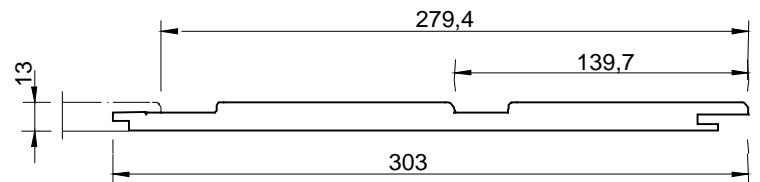

vinyWood® Classic

Width	173	mm
Cover width	152,4	mm
Thickness	13	mm
Length	3.660	mm
Weight	approx. 9,7	kg/m ²

vinyWood® Classic

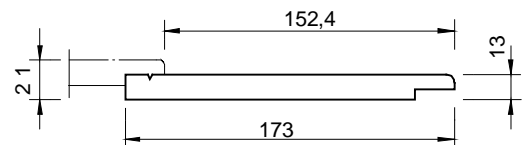

Technical Properties

Composition	91 % wood fibres	6 % phenolic resin	3 % wax
Bulk density	approx. 0,7 g/cm ³		
Longitudinal expansion (max.)	0,35 %		
Water absorption	< 0,1 %		
Fire classification	DIN EN 13501-1	Class E	
	Building material class	DIN 4102 - B2	

Assembly

Installation

vinylWood® Prestige and Classic
horizontal on a timber sub construction – as a rule

vinylWood® Provincial
vertical on a timber sub construction – as a rule

Fixing

hidden fixing with screw 3 x 40 V2A
visible fixing with colour-headed screw nail 2,7 x 50

Fixing distance

max. 400 mm

Tools

normal woodworking tools

Performance

Care

Appropriate cleaning using standard cleaning agents with the exception of scrubbing agents.
Annual hose-down with water
(please comply with local laws and regulations).

Colours

White

Almond

Green

Red Wine

Midnight Blue

Guaranty

25 years on the substrate

15 years on the finish